


# BaroSCOUT 2X

## BAROMETRIC PRESSURE/TEMPERATURE SMART SENSOR

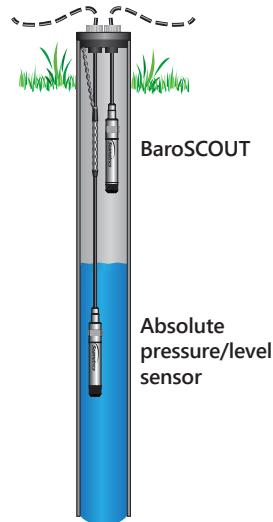

### APPLICATIONS

Barometrically compensate absolute pressure sensors for level measurement—no desiccant tubes, bellows, or vent tubes needed!

Supplement aquifer test data in leaky or confined conditions

### Features

- Measures/Records barometric pressure and temperature
- Low power — 4.4 year battery life
- Replaceable battery
- Modbus® RTU (RS485) & SDI-12
- $\pm 0.05\%$  FS accuracy
- Small diameter — 0.875" (2.22 cm)
- 100,000 record non-volatile memory
- Barometric compensation utility
- Double O-rings for added protection
- Free new Aqua4Plus 2.0 software

The **Seametrics BaroSCOUT 2X** Smart Sensor is designed to measure barometric pressure, along with temperature. It is an ideal companion to our absolute pressure/level sensors and can be used to adjust their readings for atmospheric pressure.

This industry standard digital RS485 interface device records up to 100,000 records of pressure, temperature, and time data, operates with low power, and features easy-to-use Aqua4Plus 2.0 software with powerful features. Constructed with 316 stainless steel, acetal, and Viton®, this sensor provides high-accuracy readings in rugged and corrosive field conditions.

The BaroSCOUT 2X utilizes an extremely rugged and stable piezo-electric media-isolated pressure element combined with a 16-bit analog-to-digital converter. This provides extremely accurate and stable pressure input into the microprocessor on the circuit board that measures the pressure and stores the data in non-volatile memory.

A replaceable 2/3 AA 3.6v lithium battery powers the BaroSCOUT 2X. The unit is programmed using our easy-to-use control software. Once programmed the unit will measure and collect data at the time interval programmed.

While most will use the BaroSCOUT 2X with Seametrics' Aqua4Plus 2.0 software, it is by no means limited to that software. You can use your own software or logging equipment to read measurements via RS485 and/or SDI-12, tying into your existing telemetry and control systems.


Note: The BaroSCOUT 2X is intended for use in atmosphere—not to be submerged.

### Contact Your Supplier



# BaroSCOUT 2X

## BAROMETRIC PRESSURE/TEMPERATURE SMART SENSOR

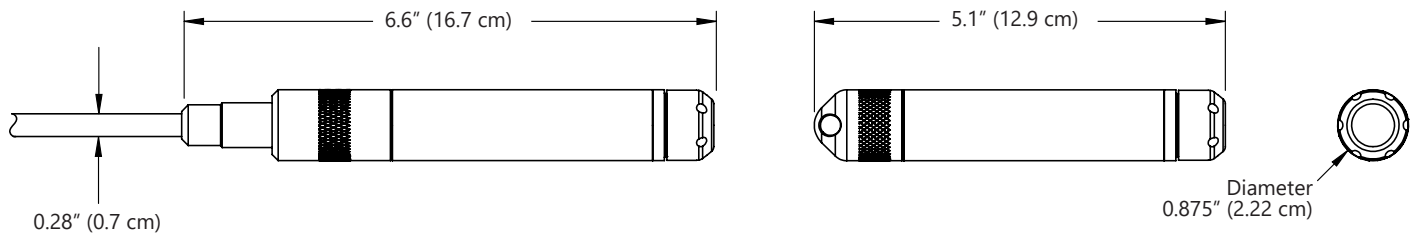

### GENERAL

<b>Length (cabled version)</b>	6.6" (16.7 cm)
<b>Length (cableless version)</b>	5.1" (12.9 cm)
<b>Diameter</b>	0.875" (2.22 cm)
<b>Body Material</b>	316 stainless steel
<b>Wetted Materials</b>	316 stainless steel, acetal, fluoropolymer
<b>Communication</b>	RS485 Modbus® RTU & SDI-12
<b>Direct Modbus Read Output</b>	32-bit IEEE floating point
<b>Internal Math</b>	32-bit floating point
<b>SDI-12</b>	(ver.1.3) - ASCII
<b>Operating Temp. Range</b>	-20° C to 60° C
<b>Storage Temp. Range</b>	-40° C to 80° C
<b>Regulatory</b>	CE

### LOGGING

<b>Memory</b>	100,000 records
<b>Logging Rate</b>	Configurable down to 1/second
<b>Software</b>	Complimentary Aqua4Plus 2.0
<b>File Formats</b>	.csv / .a4d

### POWER

<b>Internal Battery</b>	One replaceable 2/3 AA 3.6V lithium battery
<b>Expected Battery Life</b>	4.4 years (at 4 readings per minute)

### TEMPERATURE

<b>Element Type</b>	Thermistor
<b>Accuracy</b>	± 0.1° C (from -20° C to 60° C)
<b>Resolution</b>	0.01° C
<b>Units</b>	Celsius, Fahrenheit, Kelvin

### PRESSURE

<b>Transducer Type</b>	Silicon strain gauge
<b>Transducer Material</b>	316 stainless steel
<b>Units</b>	PSI, FtH <sub>2</sub> O, inH <sub>2</sub> O, cmH <sub>2</sub> O, mmH <sub>2</sub> O, mH <sub>2</sub> O, inHg, cmHg, mmHg, Bars, mBars, kPa
<b>Accuracy</b>	± 0.008 PSI ( 0.55 mbar) (@ 20° C) ± 0.02 PSI (1.34 mbar) (@ -20° C to 60° C)
<b>Resolution</b>	0.01% FS (typical)

NOTE: Intended for use in atmosphere—not to be submerged.

**User is responsible for reviewing end use application with their supplier for product suitability.**

**We represent this supplier.  
For more information contact  
Observator Instruments:**

**T: +31 (0)180 463411  
E: [info@observator.com](mailto:info@observator.com)**

Rietdekkerstraat 6  
2984 BM Ridderkerk  
The Netherlands

#### **Welcome to the world of Observator**

Since 1924 Observator has evolved to be a trend-setting developer and supplier in a wide variety of industries. Originating from the Netherlands, Observator has grown into an internationally

oriented company with a worldwide distribution network and offices in Australia, Germany, the Netherlands, Singapore and the United Kingdom.

[www.observator.com](http://www.observator.com)