

3-Axis Horizontal-Head Anemometer


Key Features

- Precision 3-axis sonic anemometer
- Horizontal head for minimal flow disturbance
- Integral electronics
- 0-45m/s wind speed
- Stainless steel construction
- 32Hz output rate
- Sonic temperature output
- U, V, W Vector outputs

The WindMaster HS anemometer has been designed for scientific research applications requiring accurate 3-axis wind speed and direction and sonic temperature data.

This instrument utilises advanced ultrasonic measurement technology, with a unique horizontal head design which allows for accurate measurement of high angles of attack with minimum flow interruption from the anemometer geometry.

The Integral electronics unit provides four optional analogue inputs and outputs.

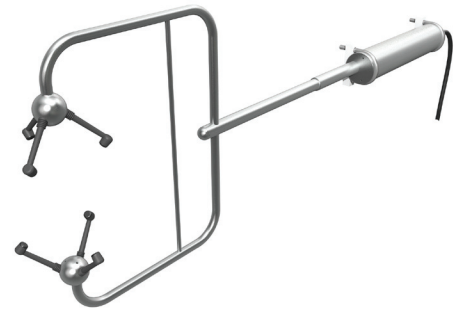

WIND SPEED

Range	0 - 45 m/s
Resolution	0.01 m/s or 0.001 m/s
Accuracy*	<1.5% RMS @12 m/s
Accuracy*	<1% RMS @12 m/s (Custom)

DIRECTION

Range	0 - 359.9°
Resolution	0.1°
Accuracy	2° @12 m/s
Accuracy	0.5° @12 m/s (Custom)

SONIC TEMPERATURE

Range	-40°C to +70°C
Resolution	0.01°C
Accuracy	-20°C to +30°C within ±2°C of ambient temperature

SPEED OF SOUND

Range	300-370 m/s
Resolution	0.01 m/s
Accuracy	< ±0.5% @ 20°C

MEASUREMENT

Internal sample rate	20Hz / 32 Hz or sync to user poll
Output rate	1, 2, 4, 5, 8, 10, 16, 20 & 32 Hz
Units of measure	m/s, mph, kph, knots, ft/min
Formats	UVW or Polar

POWER REQUIREMENT

Anemometer	9-30 VDC (55mA @12 VDC)
------------	-------------------------

*Accuracy specification applies for wind speeds <32m/s and for wind incidence <±150° in the horizontal plane and up to ±30° from the horizontal.

DIGITAL OUTPUT

Communication	RS232, 422, 485* * 2 wire point to point
Baud rates	2400 - 57600
Format	ASCII or Binary

ANALOGUE OUTPUTS - OPTIONAL

Resolution 14 bits	4 channels available
Selectable range	User selectable full scale wind speed
Output type	0-20mA, 4-20mA, 0-5V, ±2.5V, ±5V

ANALOGUE INPUTS - OPTIONAL

Resolution 14 bits	Up to 4 single ended or 2 differential
Input type	±5V

POWER REQUIREMENT

Anemometer	9-30 VDC (55mA @ 12 VDC)
------------	--------------------------

MECHANICAL

Weight	2.96 kg
Size	956 x 347 x 120mm

ENVIRONMENTAL


Protection class	IP65
Operating temp	-40°C to +70°C
Humidity	< 5% to 100% RH
Precipitation	300mm/hr
EMC	BS EN 61000 - 6 - 3 (Emissions) BS EN 61000 - 6 - 2 (Immunity)

OPTIONAL

Junction box	
Custom calibration	

Typical Applications

- Eddy Covariance Systems
 - Offshore Installations
- Structural Monitoring
 - Wind Profiling

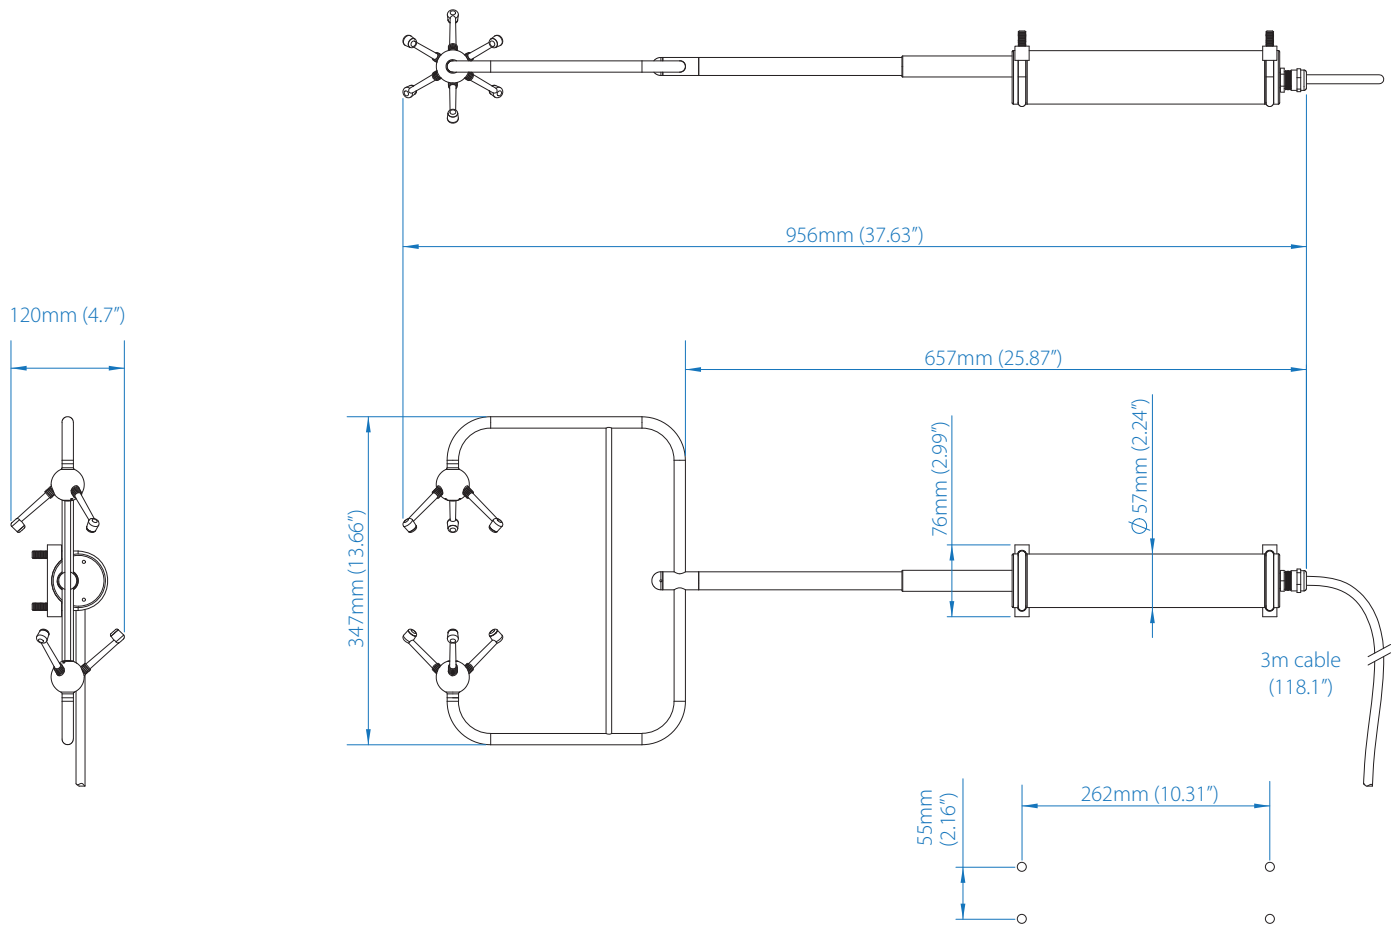

Mounting hole template for WindMaster HS 'U' Bolts
 4 holes $\varnothing 9.5\text{mm}$ (0.37")
 Max mounting plate thickness 5mm (0.19")

Specifications may be subject to change without prior notice.



Gill Instruments

Saltmarsh Park, 67 Gosport Street
 Lymington, Hampshire SO41 9EG
 United Kingdom

Tel: +44 (0) 1590 613 500

contact@gillinstruments.com

gillinstruments.com

1951-002 Iss 6

© Gill Instruments 2022

**As a representative of this supplier,
we – from Observator – distribute
these products. Originating from
the Netherlands, Observator has
grown into an internationally
oriented company with a worldwide
distribution network.**

**For more information contact
Observator Instruments:**

Australia

T: +61 3 8706 5000

E: sales.au@observator.com / service.au@observator.com

Germany

T: +49 (0)152 02047306 / +49 (0)152 02047308

E: contact@observator.com

The Netherlands

T: +31 (0)180 463411

E: sales@observator.com / service@observator.com

Poland

T: +48 537 209 665

E: a.miller@observator.com

Singapore

T: +65 68 72 08 63

E: sales@observator.sg

United Kingdom

T: +44 (0)783 346 4884

E: info.uk@observator.com

Welcome to the world of Observator

Since 1924 Observator has evolved to be a trend-setting developer and supplier in a wide variety of industries. Originating from the Netherlands, Observator has grown into an internationally

oriented company with a worldwide distribution network and offices in Australia, Germany, the Netherlands, Singapore and the United Kingdom.

www.observator.com